


FILM DATA SHEET

PFP500

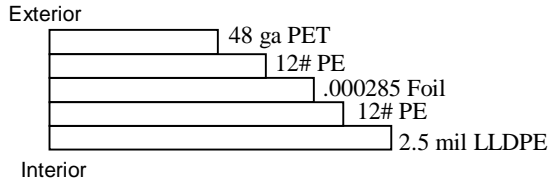

Previous Shannon Name: BFW48

Physical Description:

Silver 5mil Laminated PET/Foil/Poly barrier film



Shannon Packaging Company
14375 Telephone Ave.
Chino, CA 91710
Phone: (909) 591-8768 Fax:
(909) 591-1409
www.shannonpkg.com
SPC330R2.06.20.18

Application:

PFP500 is a cost-effective foil barrier material used where excellent oxygen and moisture levels are required. It is FDA approved, has a DULL silver appearance and is used extensively in food, medical, and general industry. It is a popular structure due to its good puncture, outstanding barrier, and relatively low cost characteristics.

Converting:

It can be converted in many ways: 2-seal pouch, 3-seal pouch, side gusset, stand up pouch and tubing. Features include: recloseable zipper, tear notch, round hang hole, and sombrero hang hole. The PFP500 can also be surface printed or reverse-trapped printed. It is available in web widths to 60+. Seal recommendation 350F; 40psi; 1/2sec.

Physical Properties:

PROPERTIES	TEST METHOD	UNIT OF MEASURE	TYPICAL VALUE
Caliper		mils	5.0
Yield		sq.in/Lb	5,179
MVTR	Mocon	gms/100 sq. in./24 hrs	.0006
OTR	Mocon	cc/100 sq. in./24 hrs	.0006

The values indicated in this document are the results of tests made in compliance with the normal standards. They are given as an indication and should be considered as average values and given without any obligation on our part. This data was provided directly to Shannon from our film supplier.

For more information about material data, please visit our web site at www.shannonpkg.com

*Your Solution
is in the bag*